

nifty

SD64 **SELF DRIVE** **WORK PLATFORM**



63ft 4in
Platform height

41ft 4in
Working outreach

4 Wheel Drive
Maximum traction
over rough terrain

4 Wheel Steer
Superior maneuverability on site

Independent Suspension
For fast comfortable
movement on site

Platform Rotation & Jib
Improved access to applications

Turf Tires Available
For minimal disruption to
sensitive grass surfaces



niftylift.com




nifty SD64



The Nifty **SD64** is the ultimate combination of trailer mounted and self propelled platforms. With full independent suspension and 4 wheel drive, the **SD64** can cope with a wide range of working environments. Low weight design make it economical to transport and 4 wheel steer gives the operator enormous flexibility to maneuver once on site. Excellent gradeability coupled with a good travel speed allow the **SD64** to be positioned and set up quickly, allowing the operator to spend more of their time working.

SAFETY FEATURES

- Pressure Sensitive Outriggers
- Audible & Visual Alarms
- Lock Valves on all Hydraulic Cylinders
- Dual Controls (Platform & Base)
- Manual Recovery with Hand-Pump
- Meets OSHA and ANSI Regulations



The extra maneuverability available from the 4 wheel steer coupled with the special "Turf Tires" make the **SD64** ideal for working on sensitive surfaces such as grass.

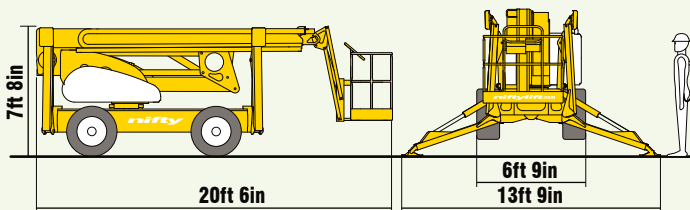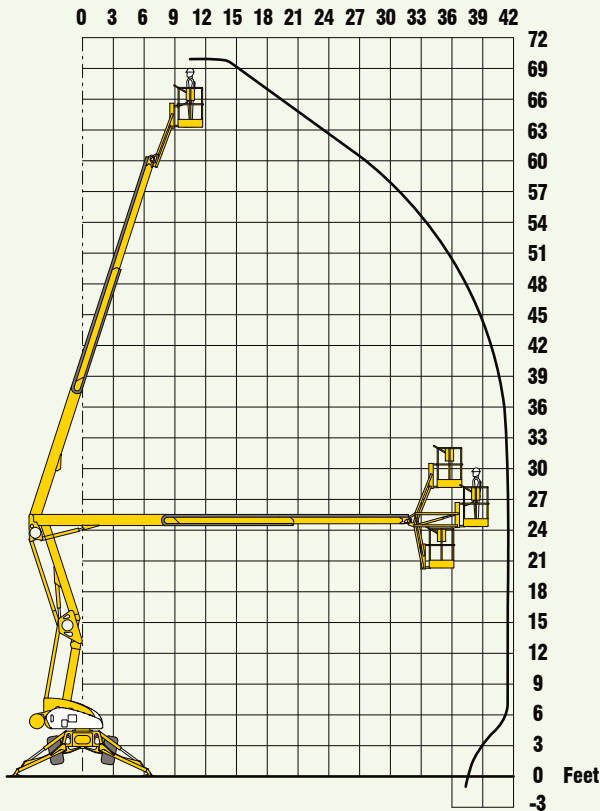

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

SPECIFICATIONS

Working Height	70ft	21.30m
Platform Height	63ft 4in	19.30m
Working Outreach	41ft 4in	12.60m
Slew	360°	
Flyboom Arc	150°	
Width - Travelling	6ft 9in	2.05m
- Working	13ft 9in	4.20m
Height	7ft 5in	2.25m
Length	20ft 2in	6.15m
Minimum Weight	8,700lbs*	3,950kg*
Turning Radius - Inside	4ft 11in	1.50m
- Outside	11ft 6in	3.50m
Platform Rotation	100°	
Platform Capacity	500lbs	225kg
Platform Size	4ft 11in x 2ft 4in	1.50m x 0.70m
Drive Speed	4.7mph	7.5kph
Gradeability	45%	
Control System	Fully proportional hydraulic	
Power System	Kubota 1505 32Hp	

* Weights may vary according to specification / power options, please confirm before ordering.

Supplied by:

NIFTYLIFT INC

32 Concourse Way,
Greer, SC 29650 USA
Sales: 1-800-NIFTYLIFT (800-643-8954)
Office: 1-877-MYNIFTY (877-696-4389)
Fax: 1-864-968-8836
e.mail: info@niftylift.com
www.niftylift.com

NIFTYLIFT LTD

Fingle Drive, Stonebridge
Milton Keynes, MK13 0ER
England, United Kingdom
Tel.: +44 (0)1908 223456
Fax.: +44 (0)1908 312733
e.mail: info@niftylift.com
www.niftylift.com